



Features

- Small Body Outline Dimensions:
- Protects one I/O or power line
- Working Voltage: 7V
- Low Leakage Current
- Response Time is Typically < 1 ns

IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (air), $\pm 30\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 9A (8/20 μs)




Mechanical Characteristics

- SOD-523 package
- Molding compound flammability rating: UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players

Schematic & PIN Configuration

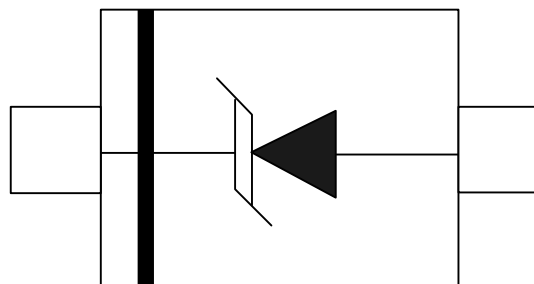


SOD-523 (Top View)

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	190	Watts
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	9	A
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Reverse Stand-Off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

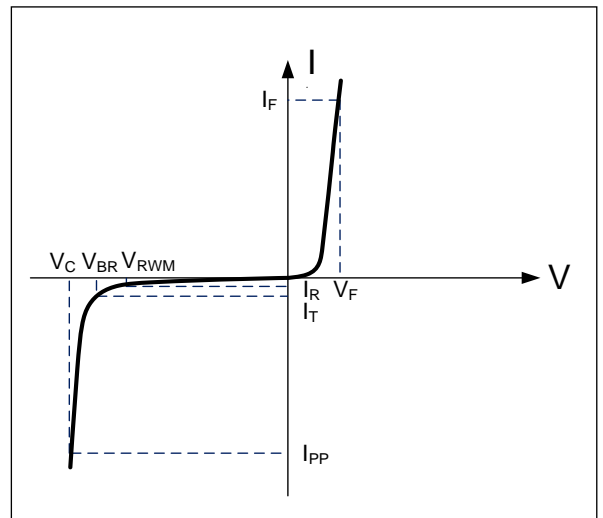

Electrical Characteristics

DW07D5-E						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				7.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	7.8			V
Reverse Leakage Current	I_R	$V_{RWM}=7V, T=25^\circ C$			500	nA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu s$			9	A
Clamping Voltage	V_C	$I_{PP}=9A, t_p=8/20\mu s$		17.5	21.0	V
Dynamic Resistance ^{1,2}	R_{DYN}	TLP=0.2/100ns		0.45		Ω
ESD Clamping Voltage ¹	V_C	$I_{PP} = 4A,$ $t_p = 0.2/100ns$ (TLP)		12.5		V
ESD Clamping Voltage ¹	V_C	$I_{PP} = 16A,$ $t_p = 0.2/100ns$ (TLP)		18.0		V
Junction Capacitance	C_j	$V_R=0V, f=1MHz$		47	55	pF

Notes : 1、TLP Setting : $t_p=100ns, t_r=0.2ns, I_{TLP}$ and V_{TLP} sample window: $t_1=70ns$ to $t_2=90ns$.

2、Dynamic resistance calculated from $I_{PP}=4A$ to $I_{PP}=16A$ using "Best Fit".

Ver.: A1 2019-02-22 WA



Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

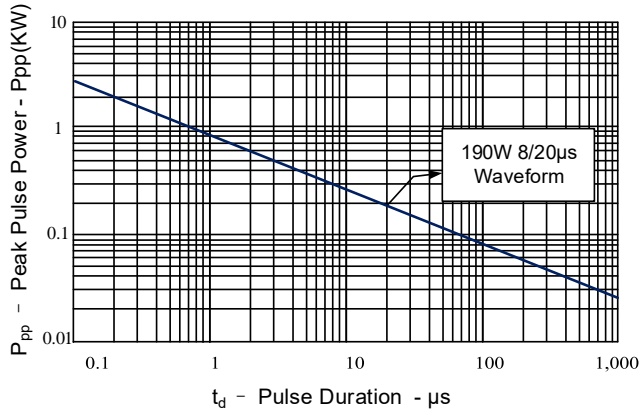


Figure 2: Power Derating Curve

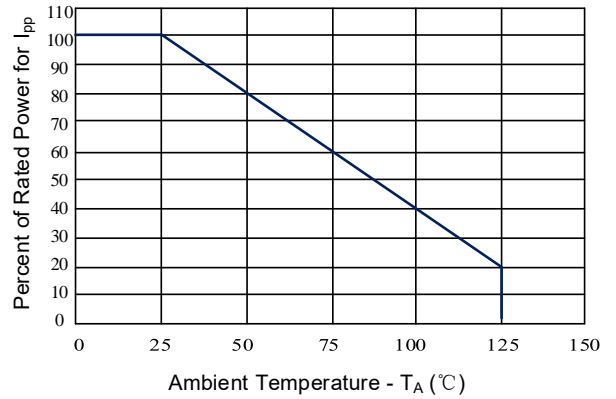


Figure 3: Clamping Voltage vs. Peak Pulse Current

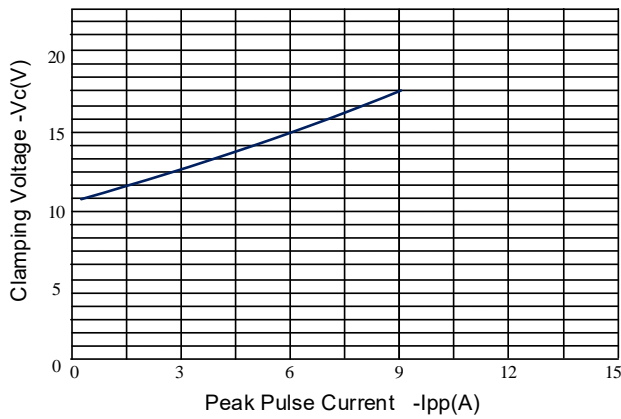


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

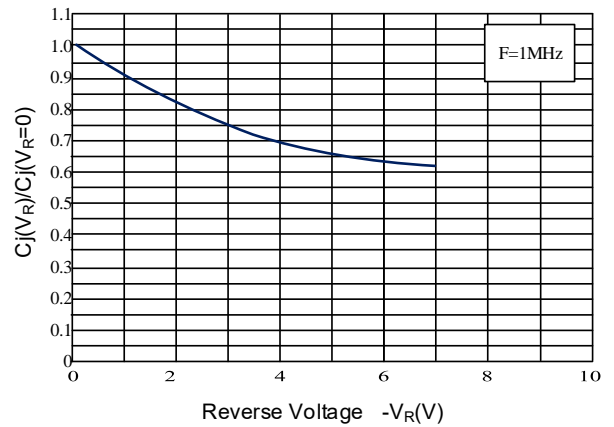


Figure 5: Pulse Waveform



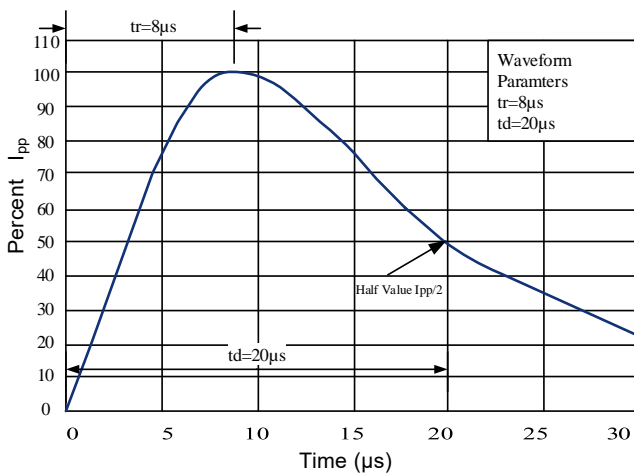


Figure 6: TLP Positive I-V Curve

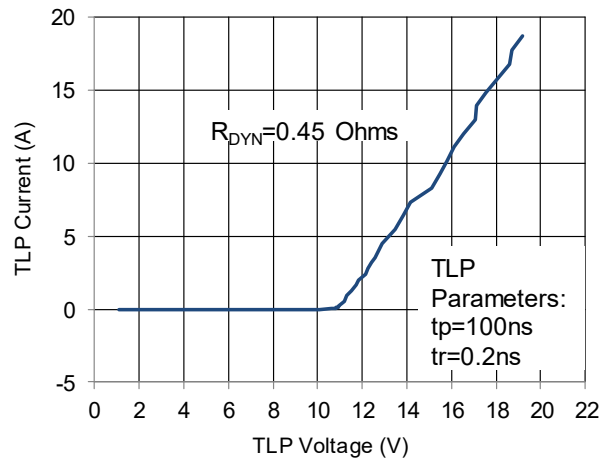

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	Temperature Min ($T_{S(min)}$)	150°C
	Temperature Max ($T_{S(max)}$)	200°C
	Time (min to max) (t_s)	60 – 190 secs
Average ramp up rate (Liquidus Temp) (T_L) to peak		5°C/second max
$T_{S(max)}$ to T_L —Ramp-up Rate		5°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_P)		260+0/-5 °C
Time within actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Do not exceed		280°C

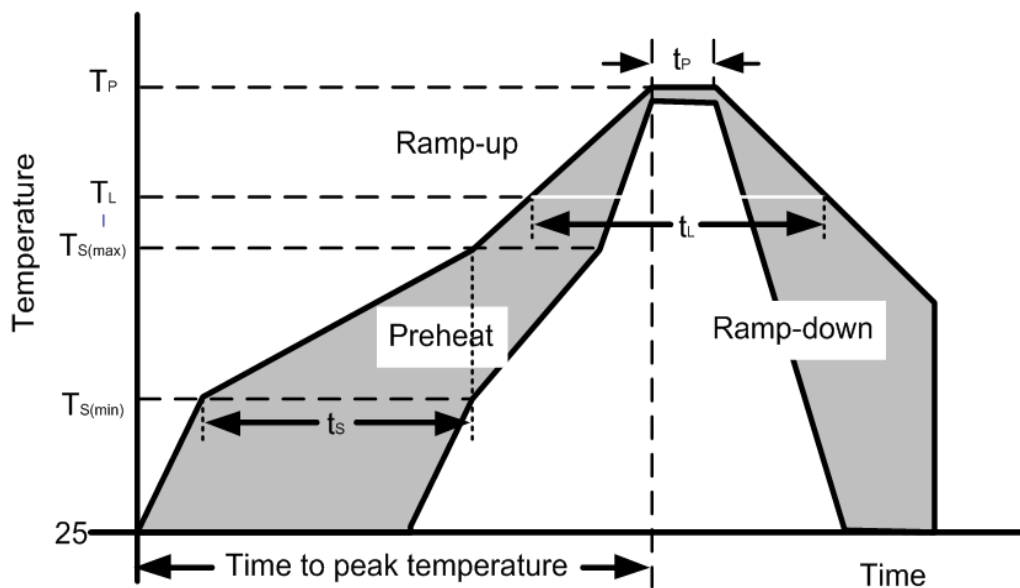



Outline Drawing –SOD-523

PACKAGE OUTLINE		DIMENSIONS																																																				
<table border="1" data-bbox="405 645 735 689"> <tr> <td>\oplus</td> <td>0.08 (0.0032)</td> <td>X</td> <td>Y</td> </tr> </table>		\oplus	0.08 (0.0032)	X	Y	<p style="text-align: center;">SOD-523</p>																																																
\oplus	0.08 (0.0032)	X	Y																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">SYMBOL</th> <th colspan="2">MILLIMETER</th> <th colspan="2">INCHES</th> </tr> <tr> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.50</td> <td>0.70</td> <td>0.020</td> <td>0.028</td> </tr> <tr> <td>A1</td> <td>0.01</td> <td>0.07</td> <td>0.001</td> <td>0.003</td> </tr> <tr> <td>b</td> <td>0.25</td> <td>0.35</td> <td>0.010</td> <td>0.014</td> </tr> <tr> <td>C</td> <td>0.07</td> <td>0.20</td> <td>0.0028</td> <td>0.0079</td> </tr> <tr> <td>D</td> <td>1.10</td> <td>1.30</td> <td>0.043</td> <td>0.051</td> </tr> <tr> <td>E</td> <td>0.70</td> <td>0.90</td> <td>0.028</td> <td>0.035</td> </tr> <tr> <td>H_E</td> <td>1.50</td> <td>1.70</td> <td>0.059</td> <td>0.067</td> </tr> <tr> <td>L</td> <td>0.15</td> <td>0.25</td> <td>0.006</td> <td>0.010</td> </tr> </tbody> </table>				SYMBOL	MILLIMETER		INCHES		MIN	MAX	MIN	MAX	A	0.50	0.70	0.020	0.028	A1	0.01	0.07	0.001	0.003	b	0.25	0.35	0.010	0.014	C	0.07	0.20	0.0028	0.0079	D	1.10	1.30	0.043	0.051	E	0.70	0.90	0.028	0.035	H _E	1.50	1.70	0.059	0.067	L	0.15	0.25	0.006	0.010
SYMBOL	MILLIMETER		INCHES																																																			
	MIN	MAX	MIN	MAX																																																		
A	0.50	0.70	0.020	0.028																																																		
A1	0.01	0.07	0.001	0.003																																																		
b	0.25	0.35	0.010	0.014																																																		
C	0.07	0.20	0.0028	0.0079																																																		
D	1.10	1.30	0.043	0.051																																																		
E	0.70	0.90	0.028	0.035																																																		
H _E	1.50	1.70	0.059	0.067																																																		
L	0.15	0.25	0.006	0.010																																																		
<p style="text-align: center;">DIMENSIONS: MILLIMETERS</p>		<p>Notes</p> <ol style="list-style-type: none"> Controlling Dimensions in Millimeters. Dimensions are exclusive of mold flash and metal burrs. 																																																				

Marking Codes

Part Number	DW07D5-E	Marking Code	
-------------	----------	--------------	--

Package Information

Qty: 5k/Reel