


2RxxAS

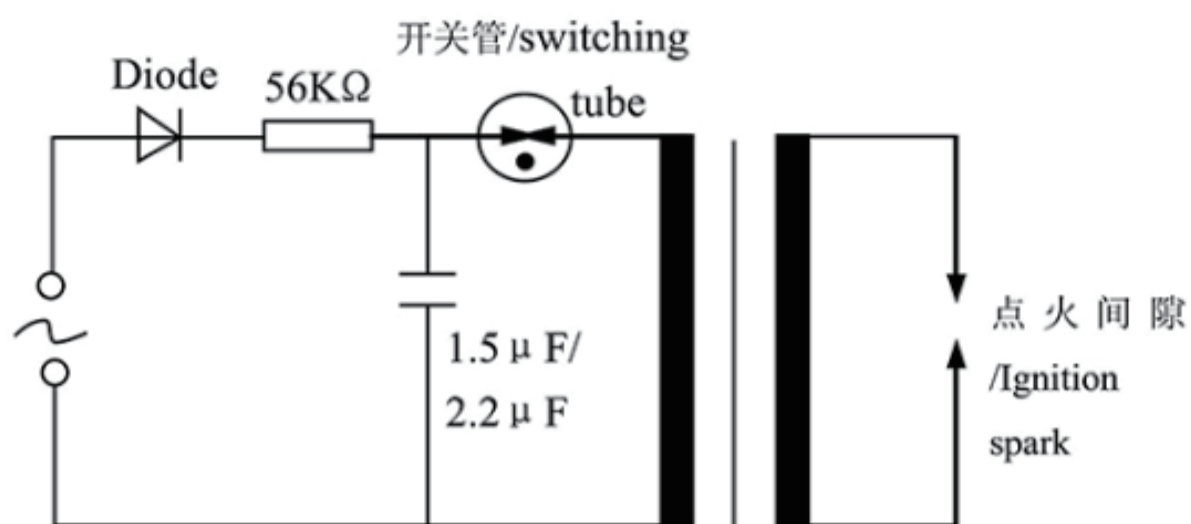

应用电路

项目 Item	规格 Specification					单位 Unit
	2R-230AS	2R-350AS	2R-610AS	2R-800AS	2R-3000AS	
标称直流击穿电压 Nominal DC Spark-over Voltage (100V/S)	230 ±15%	350 ±15%	610 ±15%	800 ±15%	3000 ±15%	V
最大开关电流 Max, switching current	100	100	100	100	100	A
最小开关电流 Min, switching current	5	5	5	5	5	A
直流状态下每秒最大点火次数 Max, ignition frequency persecond at DC	5	5	5	5	5	times
开关频率 Switching frequency	≤100	≤100	≤200	≤200	≤4 00	Hz
最小放电寿命 Min, discharge life	100000	100000	100000	100000	100000	times
绝缘电阻 insulation resistance	10	10	10	10	10	GΩ
最大极间电容 (1MHZ) Maximum capacitance	2	2	2	2	2	pF